

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
5 August 2004 (05.08.2004)

PCT

(10) International Publication Number  
**WO 2004/064639 A1**

(51) International Patent Classification<sup>7</sup>: **A61B 6/00**  
(21) International Application Number:  
PCT/IB2003/006310

(22) International Filing Date:  
10 December 2003 (10.12.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
03100096.1 20 January 2003 (20.01.2003) EP

(71) Applicant (for all designated States except US): **KONINKLIJKE PHILIPS ELECTRONICS N.V.** [NL/NL];  
Groenewoudseweg 1, NL-5621 BA Eindhoven (NL).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **BRUIJNS, Antonius, J., C.** [NL/NL]; c/o Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).

(74) Agent: **COHEN, Julius, S.**; Philips Intellectual Property & Standards, Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).

(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (regional): ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

**Declaration under Rule 4.17:**

— as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii)) for the following designations AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV,

[Continued on next page]

(54) Title: **MEDICAL IMAGING DEVICE HAVING MEANS FOR RENDERING THE DETECTOR ORIENTATION AND THE DISPLAY ORIENTATION ESSENTIALLY EQUAL**

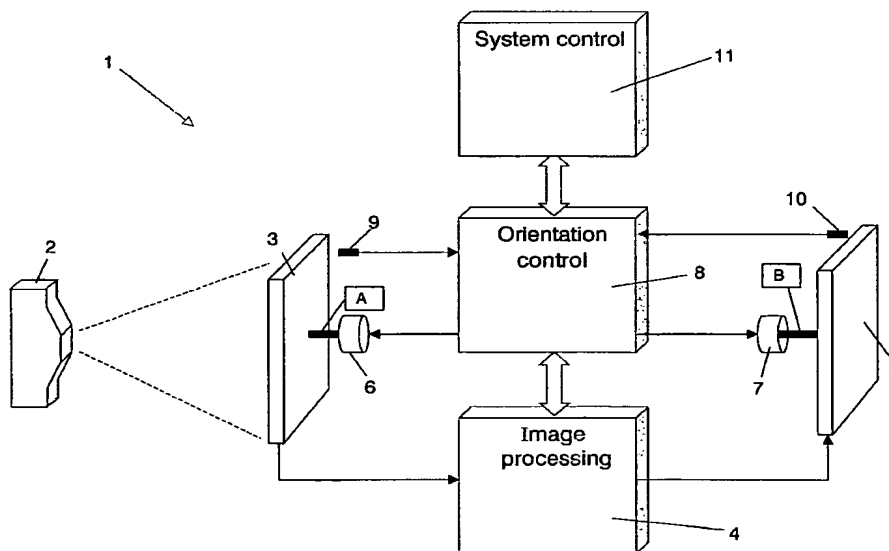

(57) Abstract: The invention refers to a medical imaging device (1) comprising an X-ray source (2) for irradiating an object to be imaged. Detector means (3) having an adjustable orientation detect the X-rays after passage through the object. Conversion means convert the detected X-rays into image data. Processing means (4) process the image data, that are displayed on display means (5) having an adjustable orientation. Means (8) are provided for rendering the orientation of the detector means and the orientation of the display means essentially equal, thus enhancing the efficiency of use of the display area.



MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW, ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG)

**Published:**

— with international search report

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

Medical imaging device having means for rendering the detector orientation and the display orientation essentially equal

The present invention relates to a medical imaging device, comprising an X-ray source for providing an X-ray image of an object, an X-ray detector to derive image data from said X-ray image and display means for displaying the image data.

Many varieties of such a medical imaging device for imaging patient data for  
5 medical purposes are known in practice. In the known systems the orientation of both the detector and the display is stationary. The detector either has a portrait or a landscape orientation depending on the medical application. Typically the display has a portrait orientation.

The known system has the disadvantage that in a considerable number of  
10 medical examinations a sub-optimal use is made of the display area for displaying the image data. For example, in case the examination was performed in the landscape orientation of the detector and the resulting image data are displayed on the stationary display screen having a portrait orientation, less than 60 % of the display area is used, assuming that the detector and the display both have a 3:4 aspect ratio.

15 It is an object of the invention to provide a device of the type as described above that solves this problem.

The medical imaging device according to the invention is therefore characterized in that the X-ray detector has an adjustable detector orientation relative to the object, the display means have an adjustable display orientation relative to a viewer, and  
20 orientation control means are provided for rendering the detector orientation and the display orientation essentially equal.

By allowing the display means to be adjusted to the same orientation as the detector means always a 100% efficient use of the screen area is made resulting in a maximum image quality and enhanced viewer comfort.

25 It is noted that a display screen that is adjustable between a portrait and a landscape orientation is known per se, for instance from US 2001/0048584.

In a first preferred embodiment of the device according to the invention the orientation control means are arranged for automatically coupling the detector orientation and

the display orientation. An automated coupling assures an equal orientation of both the detector and the display.

In second preferred embodiment the orientation control means are arranged for automatically providing a signal to the viewer in case the detector orientation and the display orientation are different. The viewer has to decide whether or not the display orientation needs to be adjusted in order to enhance the efficiency of use of the display screen. This embodiment is especially useful in a safety critical environment wherein automatic movement of medical equipment is undesirable.

In a practical embodiment of both the first and the second preferred embodiments the orientation control means comprise means for detecting the detector orientation and/or means for detecting the display orientation. Preferably the orientation control means are arranged to compare the detector orientation to the display orientation.

In the first preferred embodiment the detector orientation may be leading and the orientation control means are arranged for automatically adjusting the display orientation such that it is essentially equal to the detector orientation. Alternatively the display orientation may be leading and the orientation control means are arranged for automatically adjusting the detector orientation such that it is essentially equal to the display orientation. In both embodiments advantageously the operator ( or the viewer) of the medical imaging device can also either control the display orientation by changing the detector orientation or vice versa.

In the second preferred embodiment preferably the signal comprises a message on the display means indicating that the display means need to be adjusted. The viewer may decide whether or not to act upon such a message in the given circumstances.

In a further detailed embodiment the processing means are arranged for controlling the coupling means. Advantageously the processing means select the optimal detector orientation and also automatically assure or signal the optimal display orientation.

The invention will be further explained by means of the attached drawing, in which:

30

Figure 1 schematically shows a first preferred embodiment of the medical imaging device according to the invention.

Figure 1 schematically shows a medical imaging device 1 according to the invention. The invention is directed to a medical imaging system in general. As an example device 1 is a diagnostic or interventional X-ray system, such as a Universal Radiography and Fluoroscopy (URF) system. Device 1 comprises an X-ray source 2 for  
5 irradiating an object to be imaged, notably a human patient (not shown). A detector 3 is located behind the object for detecting the X-rays after passage through the object. Conversion means for converting the detected X-rays into image data are provided. The conversion means are not shown as they are typically comprised in the detector. The image data are sent to processing means 4 for processing the image data. The resulting processed  
10 image data are shown on display means 5. Such a system is well known in the relevant field for imaging patient data for medical purposes.

Detector 3 is rotatable around axis A by means of a motor 6. Display 5 is rotatable around axis B by means of a motor 7. Orientation control means 8 are arranged to render the detector and the display orientation essentially equal. To this end the orientation  
15 control means 8 control the motors 6 and 7. Typically the detector 3 and the display 5 are rotatable between a portrait and a landscape orientation. It is noted that the detector orientation is defined with respect to the object to be imaged, for example a patient on a patient table, whereas the display orientation is defined with respect to the viewer, which will generally be a medically skilled person.

20 Detector 3 is an asymmetrical detector having an aspect ratio of for instance 3:4, which is commonly used in the relevant field. The detector is preferably flat and may be of any type, such as an LCD detector or a TFT detector.

Display screen 5 is an asymmetrical display also having an aspect ratio of for instance 3:4, which is commonly used in the relevant field. The display may be a clinical  
25 CRT display as well as flat panel display or any other type of display.

In device 1 the orientation control means 8 are arranged for coupling the rotation of the detector means 3 and the display means 5. A sensor 9 is located in the vicinity of detector 3 to detect the orientation of detector 3. A sensor 10 is located in the vicinity of display 5 to detect the orientation of display screen 5. Sensors 9 and 10 may be position  
30 sensors or proximity sensors or any type of sensors that are known per se in the relevant field.

The signals of sensors 9, 10 are transmitted to the orientation control means 8. For example the orientation control means 8 may be arranged such that in case sensor 9 (or 10) detects the presence of detector 3 (or display 5) it is assumed that detector 3 (or display 5) has a portrait orientation. In case sensor 9 (or 10) detects the absence of detector 3 (or display

5) it is assumed that detector 3 (or display 5) has a landscape orientation. If necessary an additional sensor may be added to sensor 9 (and sensor 10) at a position that is 90 degrees rotated with respect to the position of sensor 9 (and sensor 10) such that the assumed orientation of the detector (or display) can be confirmed.

5                   The detector orientation is compared to the display orientation. If the orientations are different the orientation control means act to render the orientations essentially equal.

                  In a first mode of operation a fully automated coupling is provided wherein the orientation control means 8 are arranged for automatically coupling the detector orientation and the display orientation. In the fully automated mode the orientation control means 8  
10                   operate under control of the processing means 4.

                  Some medical examinations are performed in portrait orientation of the detector, such as medical examination of the spine. In case of spine examination the processing means 4 automatically control the orientation control means 8 for rotation of the  
15                   detector 3 to the portrait orientation. The orientation control means 8 also operate under control of the processing means 4 to automatically rotate the display screen 5 to the portrait orientation. Other medical examinations are performed in landscape orientation of the detector, such as medical examination of the pelvis. In the above explanation "landscape" should then be read instead of "portrait".

20                   In a second mode of operation a semi- automated coupling is provided, wherein the orientation control means 8 are arranged for rotating the detector 3, respectively the display 5, after detecting a difference in orientation with the display 5, respectively the detector 3.

                  For example, the detector orientation may be leading. Each time a difference  
25                   in between the detector orientation and the display orientation is detected the orientation control means 8 automatically rotate the display 5 to render the display orientation essentially equal to the detector orientation. This way the operator of device 1 can control the display orientation by changing the detector orientation.

                  Alternatively the display orientation may be leading. The operator of device 1  
30                   can now control the detector orientation by changing the display orientation. Upon detection of a difference between detector and display orientation hereto the orientation control means 8 are arranged to automatically rotate the detector 3 to render the detector the same orientation as the display.

Changing the detector orientation and/or the display orientation can either be performed manually or by means of system control 11. In the latter case the orientation control means 8 may operate under control of the system control means 11. To this end the present detector and/or display orientation is communicated to the system control means 11.

5 It is noted that for safe operation a safety system can be used to monitor and interrupt the movement of the automatically rotating detector and/or display. Such a safety system is known per se in the relevant field and is generally referred to as "bodyguard".

In an alternative embodiment instead of a (semi-) automated coupling a signal is provided to the operator (or the viewer) when a difference between the detector orientation  
10 and the display orientation is detected. An example of such a signal could be a message on the display means indicating that the display means need to be rotated. This embodiment is not shown, since it is similar to the embodiment shown in figure 1.

In order to perform the above functions the orientation control means 4 may comprise suitable software and/or hardware known per se to a person skilled in the art.

15 It is noted that by an "asymmetrical detector" (respectively display) a detector (respectively display) is meant either having an asymmetrical shape or having a symmetrical shape, but using an asymmetrical area thereof. In both situations the invention allows for a rise of 78% of efficiency of use of the display area, in case of a detector 3:4 aspect ratio. The invention is thus of course not limited to the described or shown embodiments, but  
20 generally extends to any embodiment, which falls within the scope of the appended claims as seen in light of the foregoing description and drawings.


## CLAIMS:

1. Medical imaging device (1), comprising an X-ray source (2) for providing an X-ray image of an object, an X-ray detector (3) to derive image data from said X-ray image and display means (5) for displaying the image data, characterized in that, the X-ray detector (3) has an adjustable detector orientation relative to the object, the display means (5) have an adjustable display orientation relative to a viewer, and orientation control means (8) are provided for rendering the detector orientation and the display orientation essentially equal.
2. Medical imaging device according to claim 1, wherein the orientation control means (8) are arranged for automatically coupling the detector orientation and the display orientation.
3. Medical imaging device according to claim 1, wherein the orientation control means (8) are arranged for automatically providing a signal to a user in case the detector orientation and the display orientation are different.
4. Medical imaging device according to claim 1, 2 or 3, wherein the orientation control means (8) comprise means (9) for detecting the detector orientation.
5. Medical imaging device according to claim 1, 2, 3 or 4, wherein the orientation control means (8) comprise means (10) for detecting the display orientation.
6. Medical imaging device according to claim 4 and 5, wherein the orientation control means (8) are arranged to compare the detector orientation to the display orientation.
7. Medical imaging device according to claim 6, wherein the orientation control means (8) are arranged for automatically adjusting the display orientation such that it is essentially equal to the detector orientation.



8. Medical imaging device according to claim 6, wherein the orientation control means (8) are arranged for automatically adjusting the detector orientation such that it is essentially equal to the display orientation.
- 5 9. Medical imaging device according to claim 3, wherein the signal comprises a message on the display means (5) indicating that the display orientation needs to be adjusted.
10. Medical imaging device according to one or more of the preceding claims, wherein the processing means are arranged for controlling the orientation control means (8).

1/1

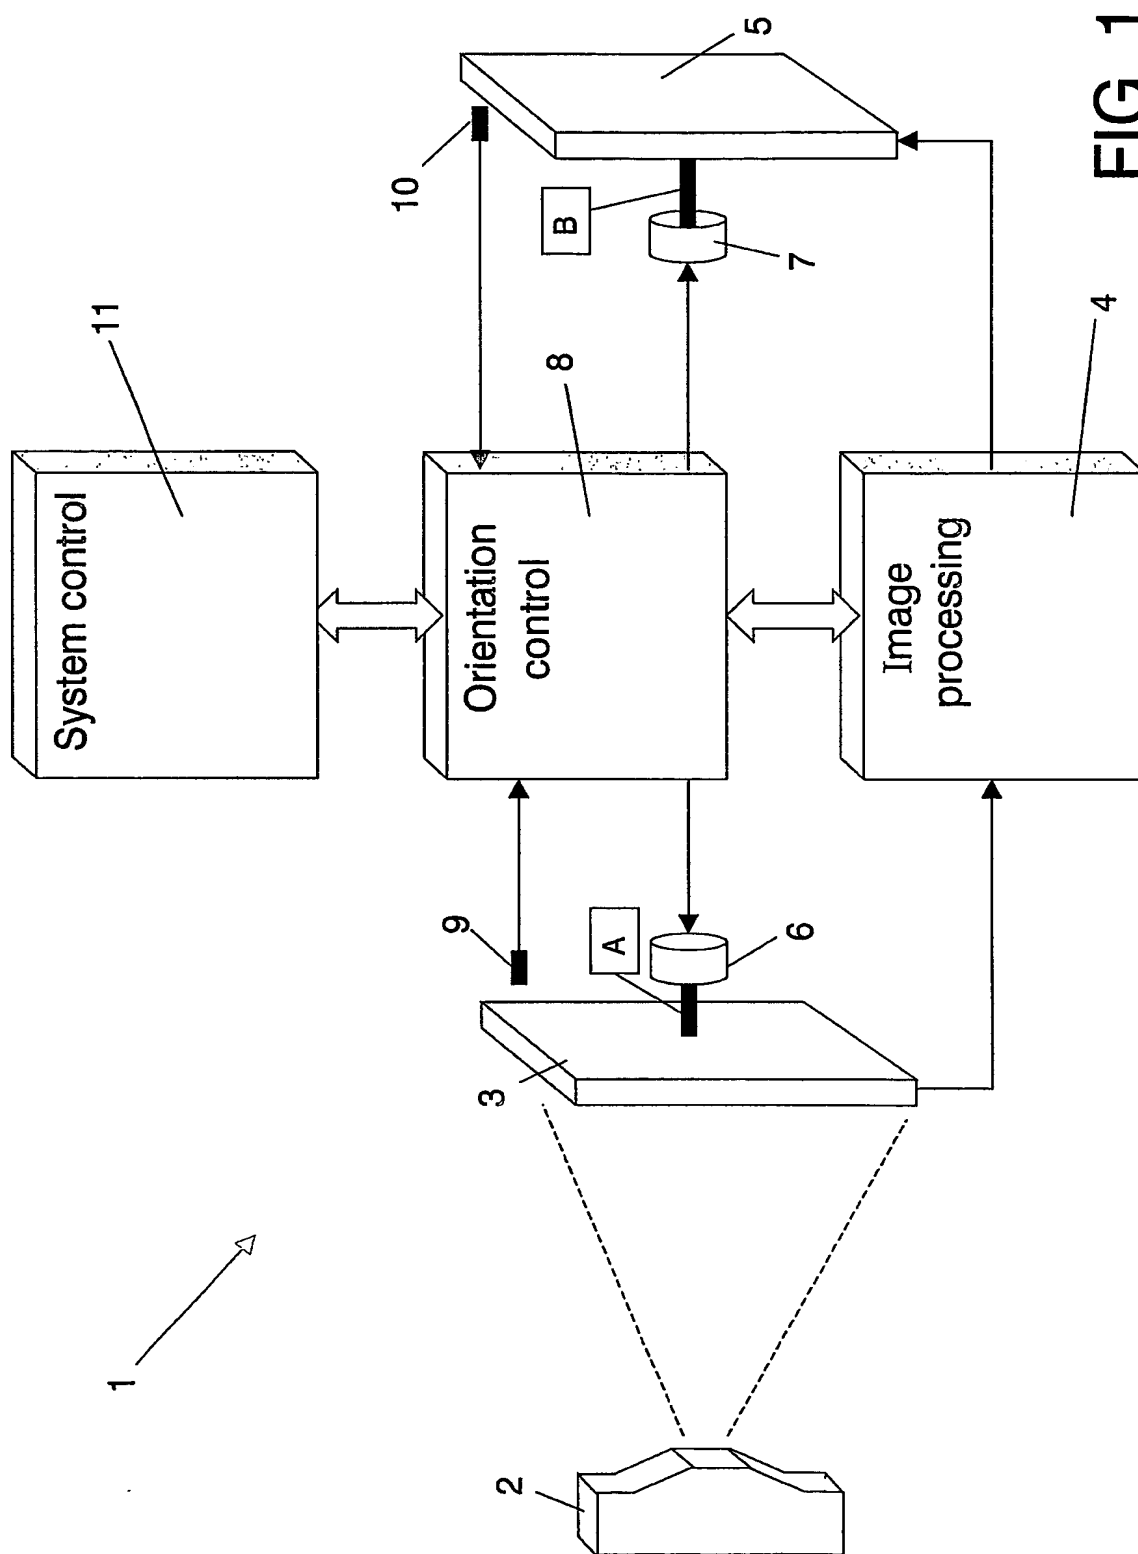

**FIG. 1**

# INTERNATIONAL SEARCH REPORT

In - na! Application No  
PCT/IB 03/06310

## A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 A61B6/00

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 A61B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the International search (name of data base and, where practical, search terms used)

PAJ, EPO-Internal, WPI Data, INSPEC

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 01/80210 A (DOME IMAGING SYSTEMS INC) 25 October 2001 (2001-10-25) page 26, line 4 -page 27, line 2 page 29, line 14 - line 15 -----	1



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

### \* Special categories of cited documents :

\*A\* document defining the general state of the art which is not considered to be of particular relevance

\*E\* earlier document but published on or after the international filing date

\*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

\*O\* document referring to an oral disclosure, use, exhibition or other means

\*P\* document published prior to the international filing date but later than the priority date claimed

\*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

\*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

\*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

\*G\* document member of the same patent family

Date of the actual completion of the international search

19 April 2004

Date of mailing of the international search report

26/04/2004

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Knüpling, M

# INTERNATIONAL SEARCH REPORT

In ... nal Application No  
PCT/IB 03/06310

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 0180210	A	25-10-2001	AU 5347401 A 30-10-2001
		EP 1285428 A1 26-02-2003	
		WO 0180210 A1 25-10-2001	

---